




# CHEMPIOIL

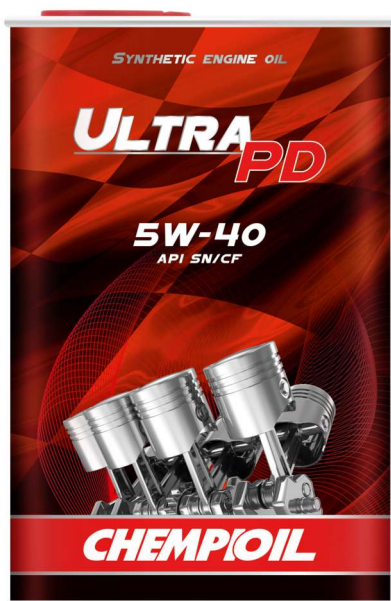

## 9719 **ULTRA PD**

Fully synthetic engine oil

> **Meets the requirements:**

SAE 5W-40, API SN/CF, ACEA C3,  
MB 229.31/229.51/226.5, VW-Norm 505 00/505 01, BMW Longlife-04,  
PORSCHE A40, FORD WSS-M2C917A, GM dexos2, RENAULT RN 0710/0700

> **Volume:**

10L, 20L, 60L, 208L, 1000L  
1L metal, 5L metal

> **Product Characteristics:**

Test	Method	Unit	Result
SAE-class			5W-40
Density at 15 °C	D 1298	kg/m <sup>3</sup>	850
Viscosity at 40 °C	D 445	Cst	79,78
Viscosity at 100 °C	D 445	Cst	13,37
Viscosity at -30 °C	D 5293	CP	5645
Viscosity index	D 2270		171
Flash point COC	D 92	°C	226
Pour point	D 97	°C	-42
TBN	D 2896	gKOH/kg	8,08

ENGINE OIL